
## IMI FLOW DESIGN

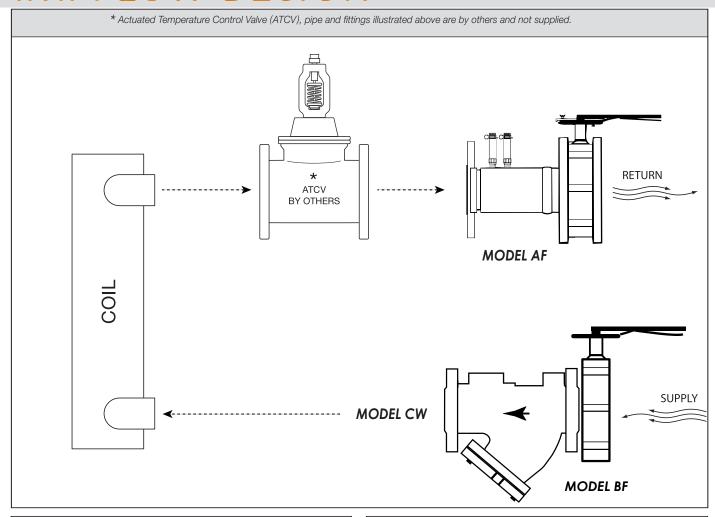

## **MODEL AF**

AccuSetter includes a flanged venturi with a lug butterfly valve attached to the downstream side. Extended SuperSeal Pressure/Temperature Ports are standard.

## **MODEL BF**

A resilient seated butterfly valve, bi-directionally designed for dead-end service. The lug body is drilled and tapped for isolation and removal of downstream piping.

## **MODEL** CW

Cast-iron flanged strainers feature a machined tapered seat which ensures a perfect fit for the removable, stainless steel screen. All sizes come complete with flanged blow-off cover, gasket and plug.

QUANTITY	SIZE	GPM	TAG